

S9033RT/S9043RT/S9053RT

LARGE DECK, ROUGH TERRAIN SCISSOR LIFTS



- Large deck rough terrain scissor lifts
- Excellent rough terrain performance
- Easy to operate
- Heavy duty design
- Ideal for construction applications

 **snorkel**[™]
www.snorkellifts.com

LARGE DECK, ROUGH TERRAIN SCISSOR LIFTS

S9033RT/ S9043RT/S9053RT



DIMENSIONS	S9033RT*	S9043RT*	S9053RT*
Max. working height	11.8m	15.1m	17.9m
Max. platform height (A)	9.8m	13.1m	15.9m
Platform size (stowed)	3.95m x 2.28m		
Platform size (single deck extended)	4.95m x 2.28m		
Platform size (optional dual deck extended)	6.7m x 2.28m		
Extension deck length	1.44m	1.44m	1.44m
Overall width (B)	2.28m	2.28m	2.28m
Overall length (without outriggers) (D)	4.08m	4.08m	4.08m
Overall length (with outriggers)	4.77m	4.77m	4.77m
Stowed height (C)	2.97m	2.99m	3.2m
Min. height (guardrails folded)	1.98m	2.18m	2.33m
Ground clearance	274mm	274mm	274mm

PERFORMANCE	S9033RT*	S9043RT*	S9053RT*
Platform capacity (SWL)	1,134kg	680kg	680kg
Max. drive height	9.75m	13.1m	13.1m
Max. wind speed	12.5m/s	12.5m/s	12.5m/s
Max. drive speed (stowed)	6.7km/h	6.7km/h	6.7km/h
Max. drive speed (elevated)	0.8km/h	0.8km/h	0.8km/h
Raise/lower time	45/30 sec	50/45 sec	55/60 sec
Gradeability	50%	50%	50%
Max. stabilizer levelling, front to rear	7°	7°	7°
Max. stabilizer levelling, side to side	12°	12°	12°
Inside turning radius	2.03m	2.03m	2.03m
Outside turning radius	5.28m	5.28m	5.28m
Tyres	12 x 33 foam filled		
Controls	proportional joystick		
Drive system	4-wheel drive		

POWER	S9033RT*	S9043RT*	S9053RT*
Power source	Kubota diesel		

WEIGHT	S9033RT*	S9043RT*	S9053RT*
Weight (without outriggers)	6,759kg	7,500kg	7,484kg
Weight (with outriggers)	7,401kg	8,147kg	8,829kg

TURNING RADIUS

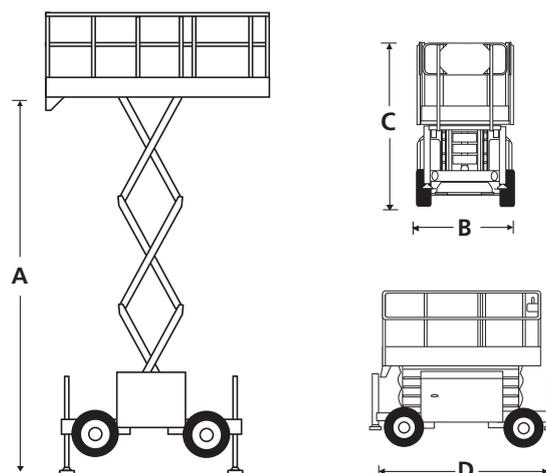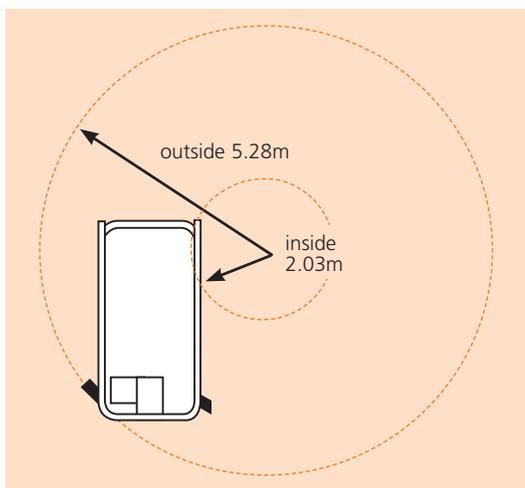

STANDARD FEATURES

- 4-wheel drive
- 4 hydraulic outriggers with automatic levelling (S9053RT only)
- Single powered deck extension
- Proportional controls
- Foam filled tyres
- Power line to platform
- Drive motion alarm
- Descent alarm
- Fold-down guardrails
- Locking oscillating axle
- Manual lowering valve
- Flashing amber light
- Dual lanyard attachment points
- Hour meter & on-board diagnostics display
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil
- Cold weather package (block heater + battery warm up)
- Single powered extension deck
- Dual powered extension decks
- Dual manual extension decks
- Hydraulic generator 110V/240V
- 12kW generator package
- 4 hydraulic outriggers with automatic levelling (S9033RT + S9043RT only)
- Snorkel OnSite™ telematics

snorkel www.snorkellifts.com

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057

e: sales.emea@snorkellifts.com